




DiffRACTIVA-sPBY

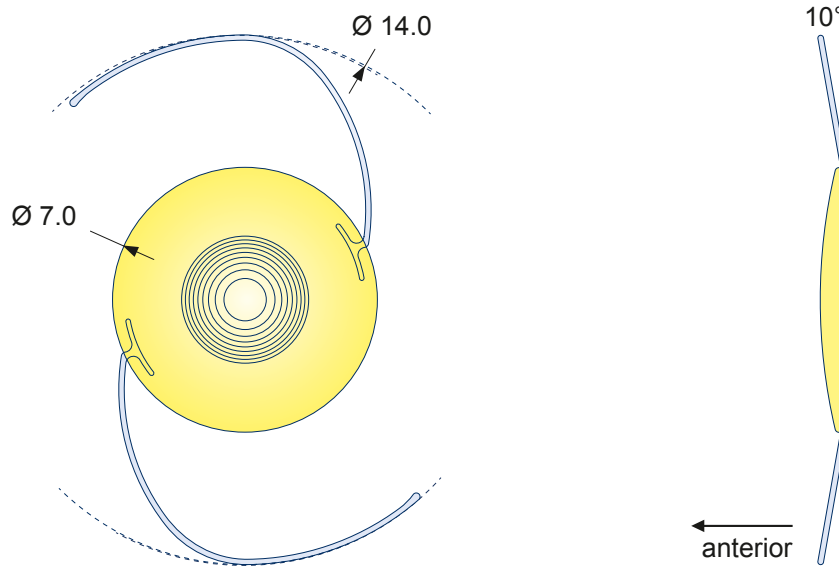

on a scale of 5:1

Technical Information

Type	Multifocal Posterior Chamber Add-On IOL with Blue Light Protection (Three Piece, Foldable) for Sulcus Fixation in Pseudophakic Eyes
Optic Material	Silicone Elastomer with UV-Absorber and Yellow Colouring Agent
Haptic Material	High Molecular PMMA
Haptic Shape	Modified C-Loop
Optic Shape	Diffractive Anterior Surface, Spheric Posterior Surface (\approx Aberration Free)*
	Convex-concave with Round Anterior Optic Edge to Prevent Iris Irritation
Diopter Range	-6.0 to 6.0 D
Diopter Steps	0.5 D
	More details on diopter categories see page 2
Near Addition	+ 3.5 D (on IOL Plane)
A-Constant (est.)	Not Applicable (by Application Principle)

HumanOptics AG

Spardorferstraße 150
91054 Erlangen

Phone: +49 (0) 9131 / 50665-0
Fax: +49 (0) 9131 / 50665-90

www.humanoptics.com
mail@humanoptics.com

03/2011

* The word „aberration“ as used in this document is interpreted as „spherical aberration“



Diopter Category – Diffractiva-sPBV

Standard	0.0 D	
Special	-6.0 to -0.5 D 0.5 to 6.0 D	in 0.5 D steps in 0.5 D steps

The diopter category does not indicate any conclusion related to availability. The delivery time of single powers might vary and is subject to change.