


Secura-sAY

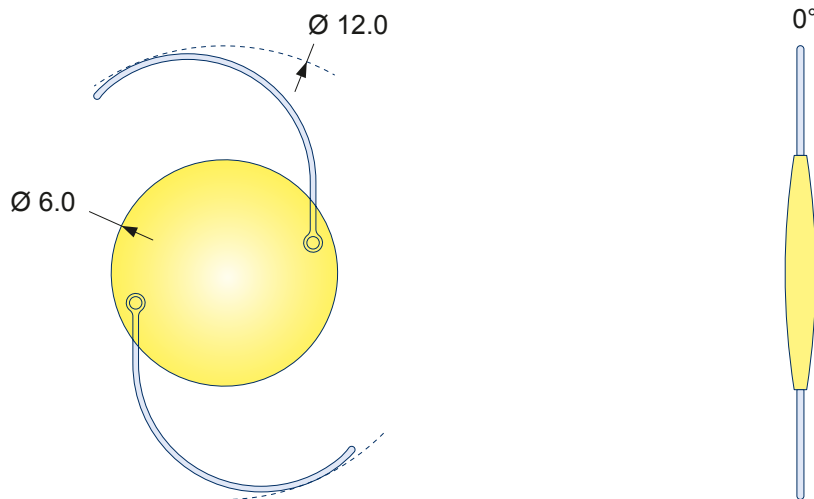

on a scale of 5:1

Technical Information

Type	Posterior Chamber IOL with Blue Light Protection (Three-Piece, Foldable, 360° Sharp Optic Edge)		
Optic Material	Silicone Elastomer with UV-Absorber and Yellow Colouring Agent		
Haptic Material	High Molecular PMMA		
Haptic Shape	Modified C-Loop		
Optic Shape	Spheric Anterior Surface, Aspheric Posterior Surface (Aberration Correcting)*		
	Concave-convex	Biconvex	
Diopter Range	-6.0 to 6.0 D	7.0 to 31.0 D	32.0 to 40.0 D
Diopter Steps	1.0 D	0.5 D	1.0 D
	More details on diopter categories see page 2		
A-Constant (est.)**	118.6		

HumanOptics AG

Spardorferstraße 150
91054 Erlangen

Phone: +49 (0) 9131 / 50665-0
Fax: +49 (0) 9131 / 50665-90

www.humanoptics.com
mail@humanoptics.com

03/2011

* The word „aberration“ as used in this document is interpreted as „spherical aberration“

** For current status and more details please refer to www.humanoptics.com



Diopter Category – Secura-sAY

	Standard	-6.0 to 6.0 D 7.0 to 31.0 D	in 1.0 D steps in 0.5 D steps
	Special	32.0 to 40.0 D	in 1.0 D steps

The diopter category does not indicate any conclusion related to availability. The delivery time of single powers might vary and is subject to change.