


## Secura-sA

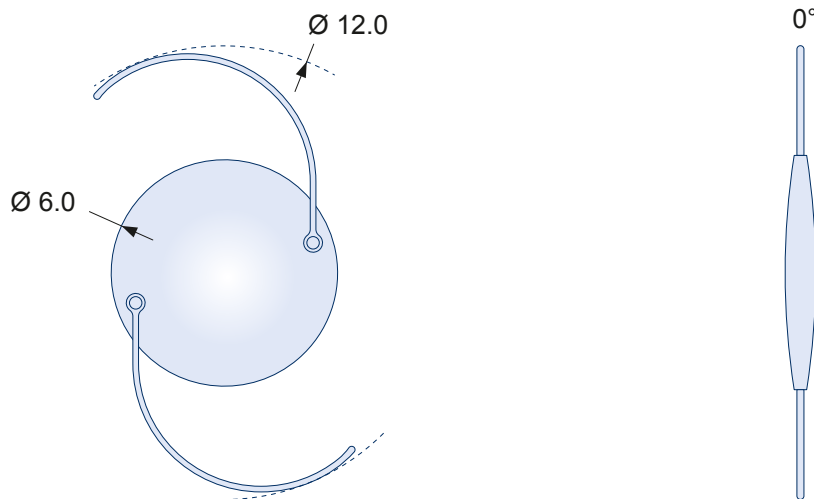

on a scale of 5:1

## Technical Information

<b>Type</b>	Posterior Chamber IOL (Three-Piece, Foldable, 360° Sharp Optic Edge)		
<b>Optic Material</b>	Silicone Elastomer with UV-Absorber		
<b>Haptic Material</b>	High Molecular PMMA		
<b>Haptic Shape</b>	Modified C-Loop		
<b>Optic Shape</b>	Spheric Anterior Surface, Aspheric Posterior Surface (Aberration Correcting)*		
	Concave-convex	Biconvex	
<b>Diopter Range</b>	-30.0 to 6.0 D	7.0 to 31.0 D	32.0 to 40.0 D
<b>Diopter Steps</b>	1.0 D	0.5 D	1.0 D
	<b>More details on diopter categories see page 2</b>		
<b>A-Constant (est.)**</b>	118.6		

## HumanOptics AG

Spardorferstraße 150  
91054 Erlangen

Phone: +49 (0) 9131 / 50665-0  
Fax: +49 (0) 9131 / 50665-90

www.humanoptics.com  
mail@humanoptics.com

03/2011

\* The word „aberration“ as used in this document is interpreted as „spherical aberration“

\*\* For current status and more details please refer to [www.humanoptics.com](http://www.humanoptics.com)



## Diopter Category – Secura-sA

	Standard	-6.0 to 6.0 D 7.0 to 31.0 D	in 1.0 D steps in 0.5 D steps
	Special	-12.0 to -7.0 D 32.0 to 40.0 D	in 1.0 D steps in 1.0 D steps
	Customized	-20.0 to -13.00 D	in 1.0 D steps
	Customized plus	-30.0 to -21.0 D	in 1.0 D steps

The diopter category does not indicate any conclusion related to availability. The delivery time of single powers might vary and is subject to change.