


Torica-sY

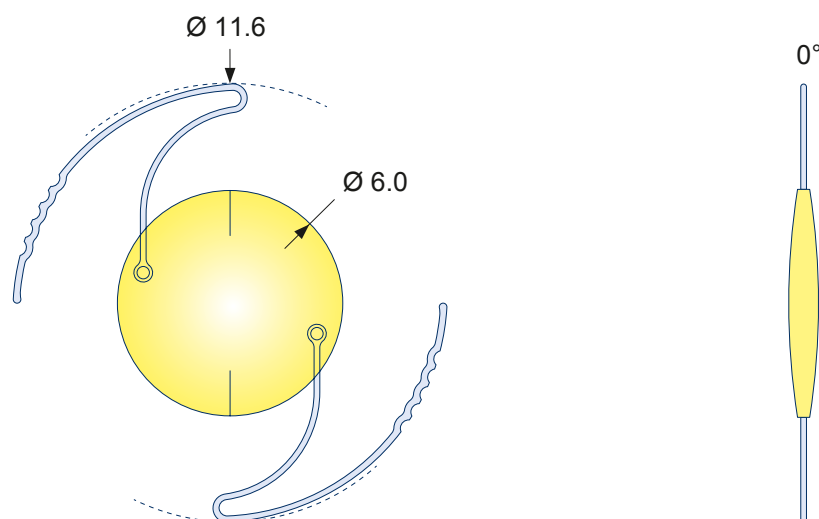

on a scale of 5:1

Technical Information

Type	Toric Posterior Chamber IOL with Blue Light Protection (Three-Piece, Foldable, 360° Sharp Optic Edge)
Optic Material	Silicone Elastomer with UV-Absorber and Yellow Colouring Agent
Haptic Material	High Molecular PMMA
Haptic Shape	Undulated Z-Loop
Optic Shape	Spheric Anterior Surface, Toric Posterior Surface
Sphere Range	in 0.5 D steps: 15.0 to 25.0 D in 1.0 D steps: -30.0 to 14.0 D / 26.0 to 34.0 D
Cylinder Range	in 0.5 D steps: 1.0 to 3.0 D in 1.0 D steps: 4.0 to max. 30.0 D*
	Availability depending on combination of sphere and cylinder. More details on diopter categories see page 2
A-Constant (est.)*	118.6
Cylinder Axis	The Two Thin Diametrically Opposed Lines in the Periphery of the Optic Indicate the Axis of the Plus-Cylinder

HumanOptics AG


Spardorferstraße 150
91054 Erlangen

Phone: +49 (0) 9131 / 50665-0
Fax: +49 (0) 9131 / 50665-90

www.humanoptics.com
mail@humanoptics.com

03/2011

Dioptr Category – Torica-sY

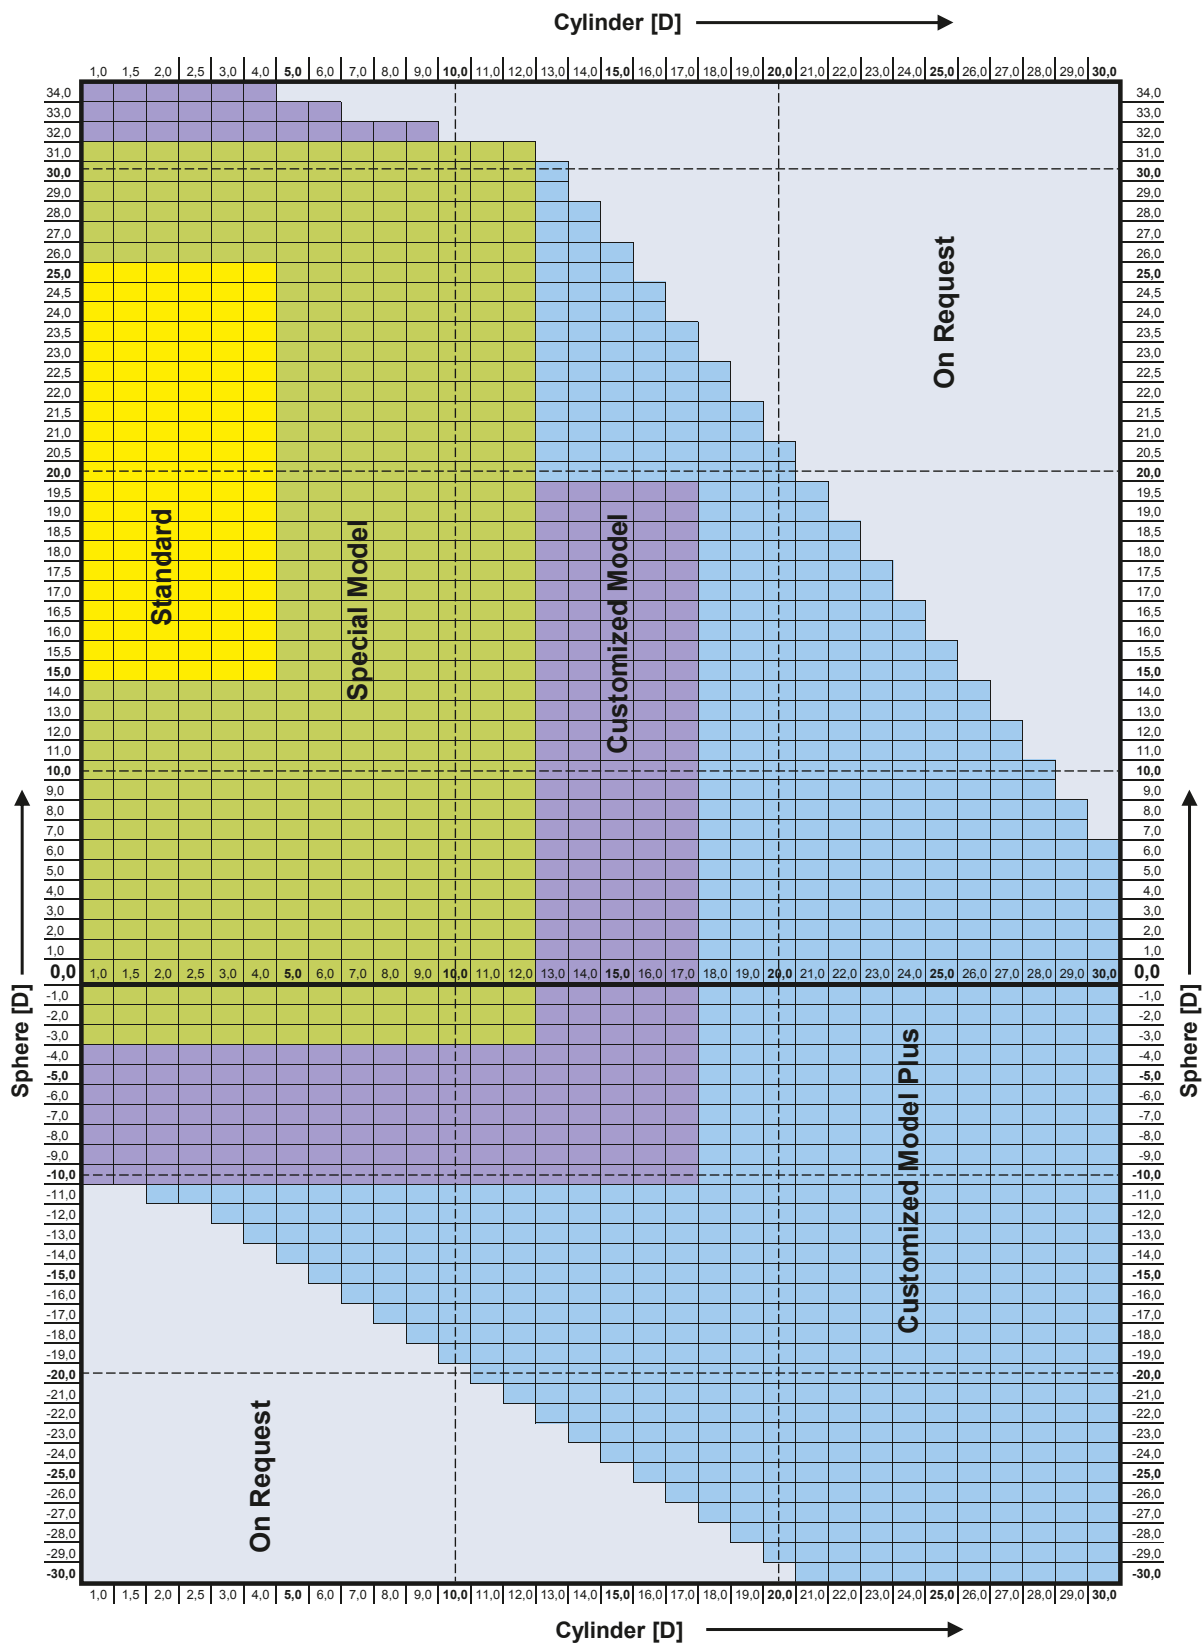

The dioptr category does not indicate any conclusion related to availability. The delivery time of single powers might vary and is subject to change.